


THESE DRAWINGS ARE THE PROPERTY OF Tt CO., LTD AND CONTAINS
CONFIDENTIAL AND TRADE SECRET INFORMATION, AND SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Tt CO., LTD

REV	DESCRIPTION	DATE

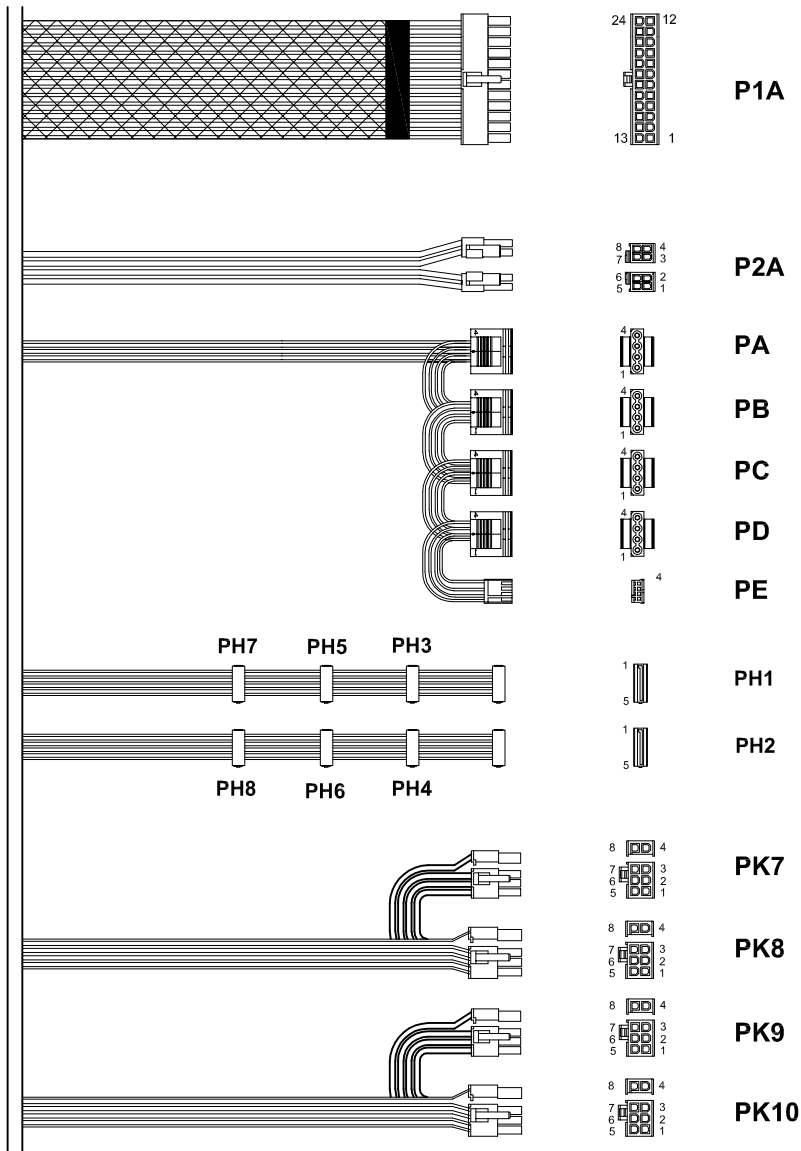

CONN	PIN NO.	WIRE COLOR	OUTPUT	WIRE AWG	LENGTH
P1A	1	ORANGE	+3.3V	18	550±25
	2	ORANGE	+3.3V	18	
	3	BLACK	COM	18	
	4	RED	+5V	18	
	5	BLACK	COM	18	
	6	RED	+5V	18	
	7	BLACK	COM	18	
	8	GRAY	PWR_OK	20	
	9	PURPLE	+5VSB	20	
	10	YELLOW	+12V	18	
	13	ORANGE	+3.3V	18	
	14	BLUE	-12V	20	
	15	BLACK	COM	18	
	16	GREEN	PS_ON#	20	
	17	BLACK	COM	18	
	18	BLACK	COM	18	
	19	BLACK	COM	18	
	20			18	
	21	RED	+5V	18	
	22	RED	+5V	18	
	11	YELLOW	+12V	18	
	12	ORANGE	+3.3V	18	
	23	RED	+5V	18	
	24	BLACK	COM	18	
P2A	1	BLACK	COM	18	450±30
	2	BLACK	COM	18	
	3	BLACK	COM	18	
	4	BLACK	COM	18	
	5	YELLOW/BLUE	+12V	18	
	6	YELLOW/BLUE	+12V	18	
	7	YELLOW/BLUE	+12V	18	
	8	YELLOW/BLUE	+12V	18	
PA	1	YELLOW	+12V	18	150±10
	2	BLACK	COM	18	
	3	BLACK	COM	18	
	4	RED	+5V	18	
PB, PC, PD, PE	1	YELLOW	+12V	18"/22	450±30
	2	BLACK	COM	18"/22	
	3	BLACK	COM	18"/22	
	4	RED	+5V	18"/22	
PH7, PH8	1	ORANGE	+3.3V	18	150±10
	2	BLACK	COM	18	
	3	RED	+5V	18	
	4	BLACK	COM	18	
	5	YELLOW	+12V	18	
PH1, PH2, PH3, PH4, PH5	1	ORANGE	+3.3V	18	450±30
	2	BLACK	COM	18	
	3	RED	+5V	18	
	4	BLACK	COM	18	
	5	YELLOW	+12V	18	
PK8	1	YELLOW	+12V	18	450±30
	2	YELLOW	+12V	18	
	3	YELLOW	+12V	18	
	4	BLACK	COM	18	
	5	BLACK	COM	18	
	6	BLACK	COM	18	
	7	BLACK	COM	18	
	8	BLACK	COM	18	
PK10	1	YELLOW/BLUE	+12V	18	450±30
	2	YELLOW/BLUE	+12V	18	
	3	YELLOW/BLUE	+12V	18	
	4	BLACK	COM	18	
	5	BLACK	COM	18	
	6	BLACK	COM	18	
	7	BLACK	COM	18	
	8	BLACK	COM	18	

NOTE: K8&K7 Length is 150mm±10

MATERIAL		Tt® Thermaltake Technology Co., Ltd			
FINISH					
COLOR					
TOLERANCES UNLESS NOTED		REV.	A	DRAWING NAME	
0.0 ~ 5	± 0.1	WEIGHT		SMART POWER 730W	
5.0 ~ 20	± 0.2	SCALE	1:1	PART NO.	
20.0 ~ 50	± 0.3	UNIT	mm	SP-730P	
50.0 ~ 200	± 0.4	THIRD ANGLE PROJECTION		DATE	APP.
200.0 ~	± 0.5			2011/09/02	CHK.
ANGLE	± 1°				DRAW