

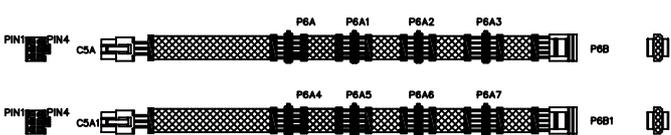
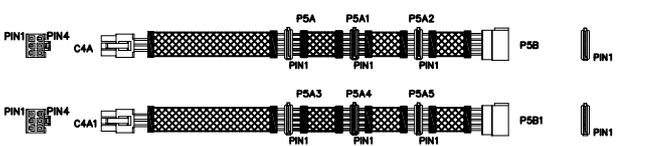
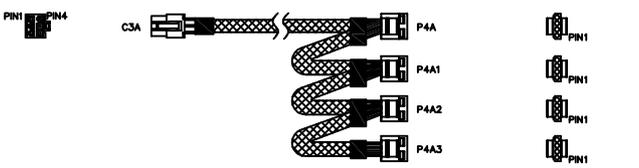
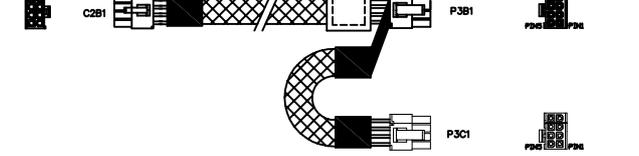
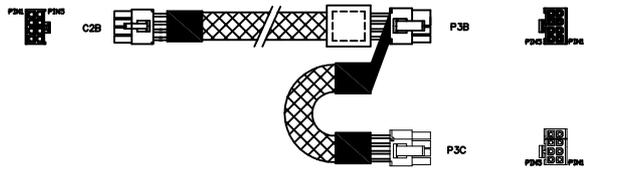
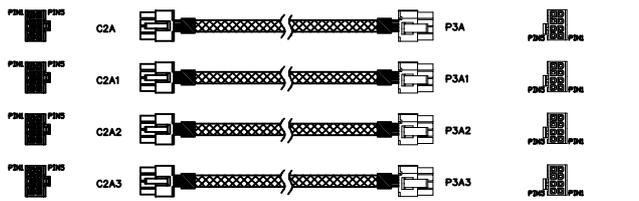


REV.	DESCRIPTION	DATE
		YYYY/MM/DD

THESE DRAWINGS ARE THE PROPERTY OF *Tt CO.,LTD.* AND CONTAINS CONFIDENTIAL AND TRADE SECRET INFORMATION.AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITER CONSENT OF *Tt CO.,LTD.*

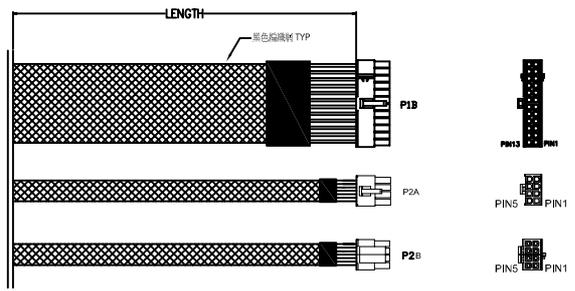

CONN	PIN	COLOR	OUTPUT	WIRE AWG	LENGTH	
P1B	1	ORANGE	+3.3V	16	21.7"±1.0" (550±25)	
	2	ORANGE	+3.3V	16		
	3	BLACK	GND	16		
	4	RED	+5V	16		
	5	BLACK	GND	16		
	6	RED	+5V	16		
	7	BLACK	GND	16		
	8	GRAY	PS	16		
	9	PURPLE	+5VSB	22		
	10	YELLOW	+12VS	22		
	11	YELLOW	+12V	18		
	12	ORANGE	+3.3V	16		
	13	ORANGE	+3.3V	18		
	14	BLUE	-12V	20		
	15	BLACK	GND	16		
	16	GREEN	PS-ON	22		
	17	BLACK	GND	16		
	18	BLACK	GND	16		
	19	BLACK	GND	16		
	20	NC	NC			
	21	RED	+5V	18		
	22	RED	+5V	22		
	23	RED	+5V	16		
	24	BLACK	GND	16		
P2A P2B	1	BLACK	GND	16	21.7"±1.0" (550±25)	
	2	BLACK	GND	16		
	3	BLACK	GND	16		
	4	BLACK	GND	16		
P3A P3A1 P3A2 P3A3	5	YELLOW	+12V	18	21.7"±1.0" (550±25)	
	6	YELLOW	+12V	16		
	7	YELLOW	+12V	16		
	8	YELLOW	+12V	16		
P3B P3B1	1	YELLOW	+12V	18	21.7"±1.0" (550±25)	
	2	YELLOW	+12V	18		
	3	YELLOW	+12V	18		
	4	BLACK	GND	18		
P3C P3C1	5	BLACK	GND	18	5.9"±1.0" (150±25)	
	6	BLACK	GND	18		
	7	BLACK	GND	18		
	8	BLACK	GND	18		
P4A	1	YELLOW	+12V	18	21.7"±1.0" (550±25)	
	2	BLACK	GND	18		
	3	BLACK	GND	18		
P4A1 P4A2 P4A3 P4A4	4	RED	+5V	18	5.9"±1.0" (150±25)	
	1	YELLOW	+12V	18		
	2	BLACK	GND	18		
	3	BLACK	GND	18		
P5A P5A1 P5A2 P5A3 P5A4	4	RED	+5V	18	21.7"±1.0" (550±25)	
	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P6A1-2 P6A3 P6A4 P6A5 P6A6	5	YELLOW	+12V	18	5.9"±1.0" (150±25)	
	1	ORANGE	+3.3V	18		
	2	BLACK	GND	18		
	3	RED	+5V	18		
	4	BLACK	GND	18		
P7A	5	YELLOW	+12V	18	5.9"±1.0" (150±25)	
	1	RED	+5V	20		
	2	BLACK	GND	20		
	3	BLACK	GND	20		
	4	YELLOW/BLACK	+12V1	20		

REV.	④	SCALE	1 : 1	UNIT	mm	 Thermaltake Technology Co., Ltd	DRAWING NAME Toughpower XT 1275W Platinum PART NO. TPX-1275MPCP DATE APP. CHK. DRAW		
GENERAL TOLERANCE		A	B						
0.0 ~ 5		± 0.2	± 0.1						
5.0 ~ 20		± 0.3	± 0.2						
20.0 ~ 50		± 0.5	± 0.3						
50.0 ~ 200		± 0.9	± 0.4						
200.0 ~		± 1.3	± 0.5						
ANGLE		± 3°	± 1°						
6	5	4	3	2	1				